


Above Ground Pool Cover Reel

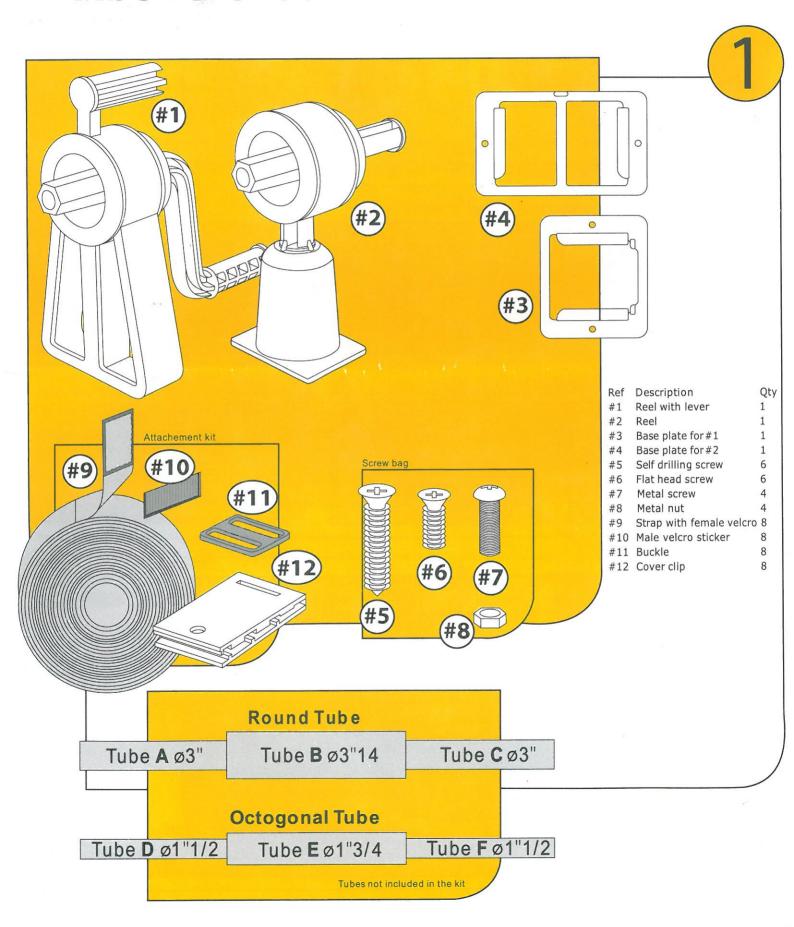


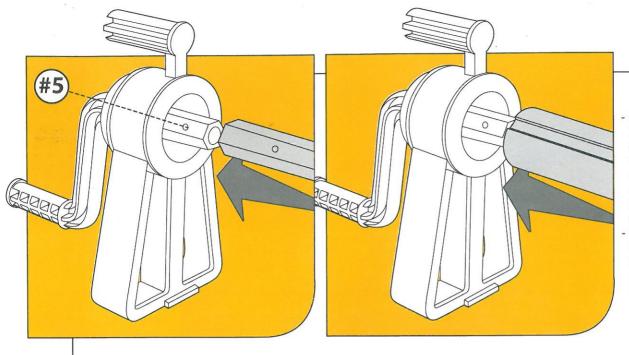


- With an octogonal tube: Insert the tube D in the reel #1. Secure the assembly with 1 self taping screws #5.Repeat the operation with the tube F and the reel #2.Secure with 1 self taping screws#5.
- With a3"round tube: Slide one end of tube A in the reel #1 until it lock itself. Repeat the operation with the tube C and the reel#2.

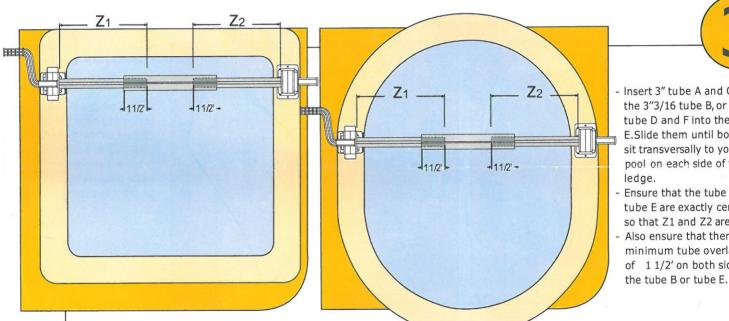



- Insert 3" tube A and C into the 3"3/16 tube B, or insert tube D and F into the tube E.Slide them until both reel sit transversally to your pool on each side of the
- Ensure that the tube B or tube E are exactly centered so that Z1 and Z2 are equal.
- Also ensure that there is a minimum tube overlapping of 11/2' on both side of








- Fasten 3 screws #6 in the pre-drilled holes at each side of the tube B or the tube E to secure the assembly.

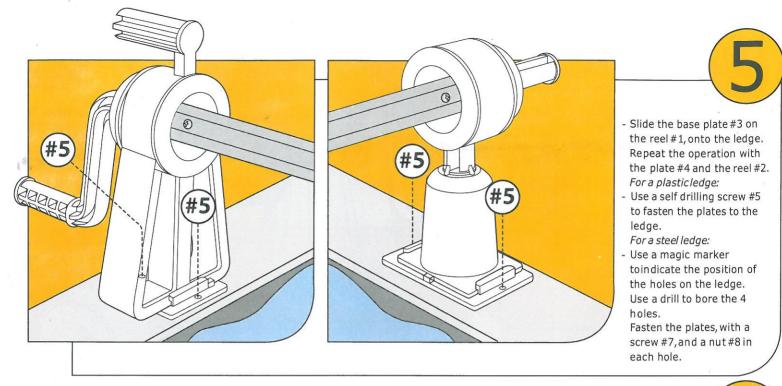

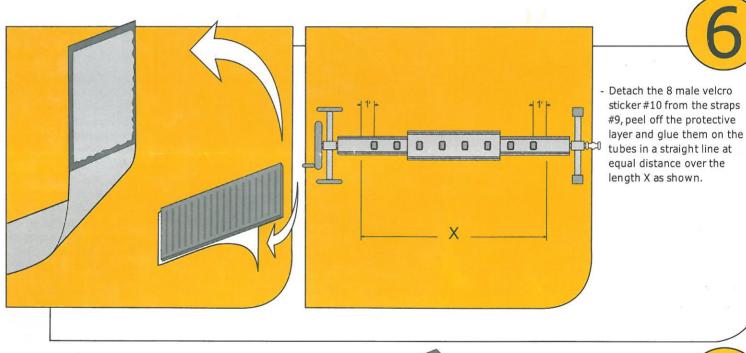

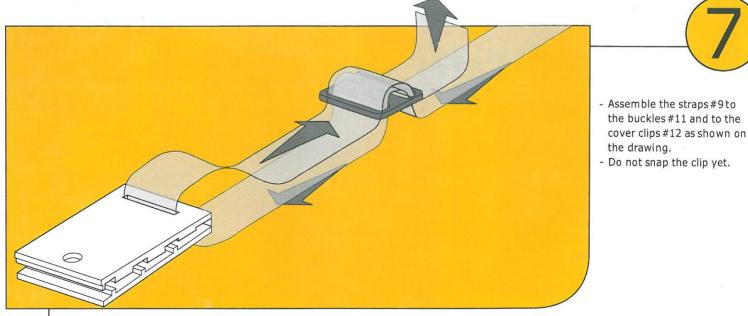




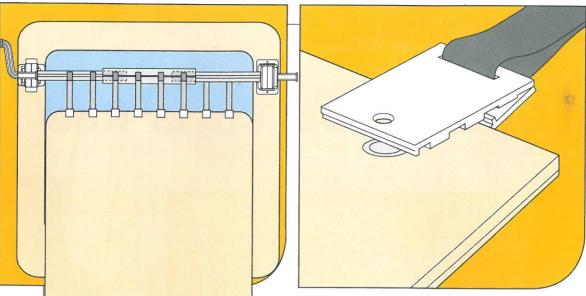




- -Open cover over the pool and set into position.
- Attach the clips # 12 in the cover at the same regular intervals as the male velcro sticker on the tubes.
- -Ensure that the lengh of the straps allows the cover to lay flat on the pool,to prevent the wind from getting under the cover.


For round or oval shape above ground pool







- -Put your cover in position on the pool,and pinch it like on the drawing.
- -Attach the clips #12 in the cover at the same regular intervals as the male velcro sticker on the tubes.
- -Ensure that the lengh of the straps allows the cover to lay flat on the pool,to prevent the wind from getting under the cover.

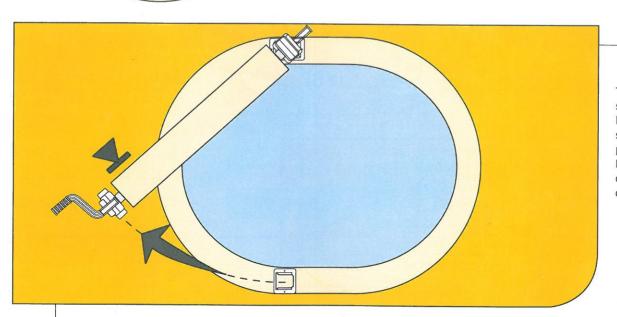

9

To remove solar reel system, slide out crank handle from base plate and swivel the reel around the pool.

Make sure that the reel sits on the ledge or remove it completly.