



C.P.A. S.R.L.

## MINI SWIMMING POOL MOD. LIBERTY SPA



**CPA S.R.L.**

Via Don Demetrio Castelli 71, Roddi (CN)  
Tel: 0173.615695 | 0173.620643  
[cpa@cpa-piscine.it](mailto:cpa@cpa-piscine.it)

## Description



The Liberty Spa mini swimming pool adapts perfectly to small spaces and indoor environments and is equipped with a thermo-insulated acrylic tank reinforced with glass fiber and steel frame, for maximum resistance to atmospheric agents, making it suitable for both outdoor and indoor installations.

Its compact dimensions facilitate its integration and installation both indoors and outdoors, while maintaining the advantages of a traditional swimming pool.

The Liberty SPA is a concentrate of technology, equipped (in the PRESTIGE version) for your well-being with:

- Counter-current swimming
- N.2 hydromassage seats
- N.2 hydromassage chaise longue
- Automated heating system

## Colors



white



sand



light blue



grey


## Available set-ups

<b>Cod. 8200151</b>	Liberty spa PRESTIGE – complete with (see equipment table)
OPTIONS	
<b>Cod. 8200162</b>	Espace flat edges kit sand color
<b>Cod. 8200163</b>	Espace flat edges kit grey color
<b>Cod. 8200145</b>	Isothermal bubble cover
<b>Cod. 8200146</b>	Winter cover with perimeter eyelets and elastic cord
<b>Cod. 8200193</b>	Rigid SPA Liberty cover

EQUIPMENT	
HYDROMASSAGE - COUNTER-CURRENT SWIMMING	
2 hydromassage seats	
2 air massage loungers	
2 hydromassage pumps – 1,5 kW	
1 counter-current pump – 2,2 kW	
1 blower – 0,9 kW	
1 circulation pump – 0,33 kW	
FILTRATION	
1 double filter cartridge skimmer	
1 technical housing	
1 electric heater with thermostat	
1 control panel with scheduling of filtration time slots	
Activation by means of LED backlit stainless steel button commands	
ACCESSORIES	
2 LED projectors	
ABSORPTION	
Single-phase or three-phase power supply on request	
Filtration and Heating [kW]	4,1
Hydromassage [kW]	6,2
WATER VOLUME	
13 m <sup>3</sup>	

## Dimensions\*

- External length: 494 cm
- External width: 228 cm
- Height: 134 ± 1 cm

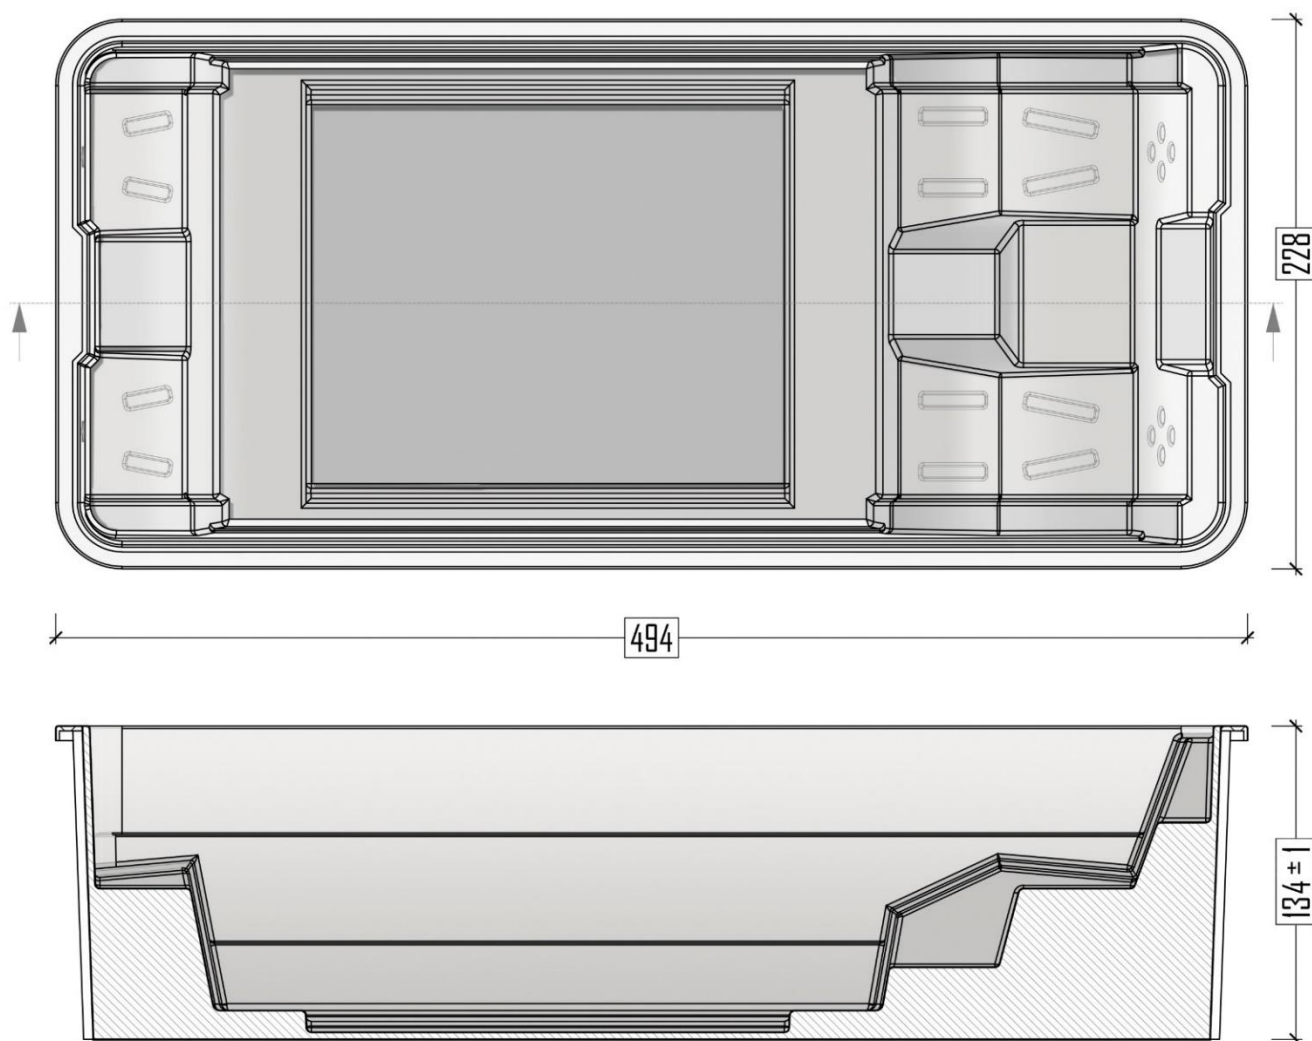

Note:

- The information contained in this document may vary at the discretion of the editor, without notice, together with the changes to the product in question in this document: it will be the responsibility of the customer when placing the order to verify the persistent correspondence of the product to the information sheet.
- Any technical diagrams reproduced in this document have a purely informative value and are not valid for regulatory purposes.

\* Given the nature of the product, there may be dimensional variations compared to what is reported in this technical data sheet.