



C.P.A.  
S.R.L.

## TILES AND ESPACE POOL EDGE



C.P.A. srl

Via Don Demetrio Castelli, 71 - 12060 RODDI (CN)  
Tel. 0173.615693 - Fax 0173.620922

[www.cpa-piscine.it](http://www.cpa-piscine.it)  
[cpa@cpa-piscine.it](mailto:cpa@cpa-piscine.it)

Ver.05- 2020-06-08

## Description

The edge and Espace tiles, the furnishing accessory for the swimming pool, are produced in outdoor agglomerate, anti-slip.

## General features

- Compressive strength: 40 MPa
- Flexural and traction strength: 2,5 kN (reference tile 50x50x2,5 cm)
- Resistance to bending and breaking: 4 MPa
- Resistance to frost, without the use of salt: suitable for outdoor installation
- Slip resistance: 24°
- Abrasion resistance: U4

## Flat espace pool edge features

**Edge thickness:** 3,4 cm

**Straight edge weight:** 12,9 kg

**Corner weight 90°:** 17,7 kg

**Backhand corner weight 90°:** 8,5 kg

**Reverse spoke weight 1,50 m:** 9,9 kg

**Reverse spoke weight 2,50 m:** 10,9 kg

**Radius weight 0,60 m:** 10,3 kg

**Radius weight 1,20 m:** 10,2 kg

**Radius weight 1,50 m:** 8 kg

**Radius weight 2,50 m:** 10 kg

**Available Colour:**



*Sand*




*White*




*Grey*


## Flat Espace edge technical dimensions




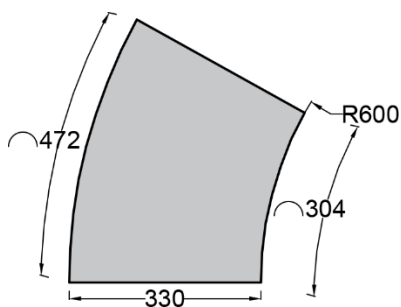
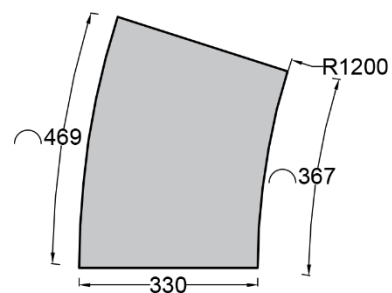
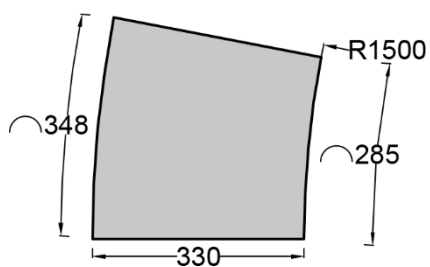
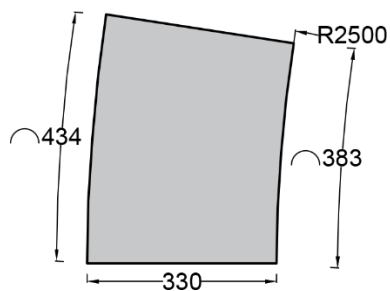


*Edge section*





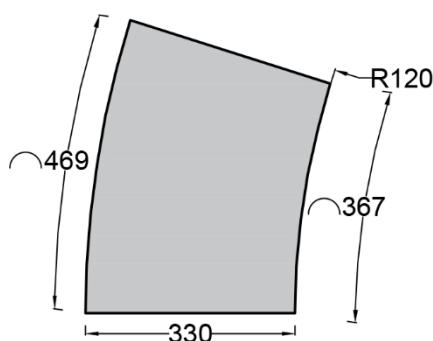
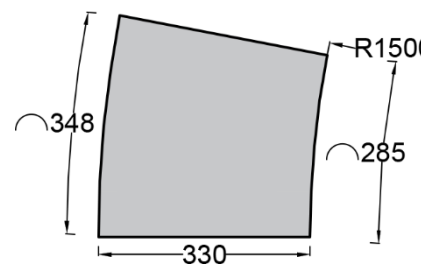
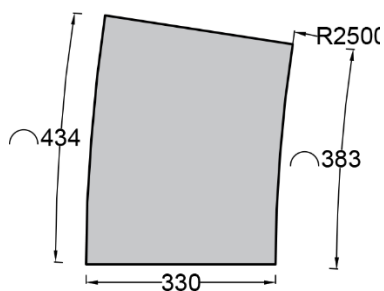


*Flat edge*



*Corner 90°*

**Reverse corner 90°****Radius 0,60 m****Radius 1,20 m****Radius 1,50 m****Radius 2,50 m****Reverse radius 1,50 m****Reverse radius 2,50 m**

**Traditional Espace edge pool Features****Straight edge weight:** 14 kg**Angle weight 90 °:** 12 kg**Reverse corner weight 90 °:** 12 kg**Available colours:***Sand***Radius Weight 1,20 m:** 10,5 kg**Radius Weight 1,50 m:** 8,3 kg**Radius Weight 2,50 m:** 10,3 kg**Technical dimensions for traditional Espace edge***Edge section**Flat edge**Corner 90°**Reverse corner 90°**Radius 1,20 m**Radius 1,50 m**Raggio 2,50 m*

### Features Espace tiles

**Tile thickness:** 2,5 cm

**Format:** 50x50 cm

**Pallet:** 18 m<sup>2</sup> - 987 Kg

**Available colours:**



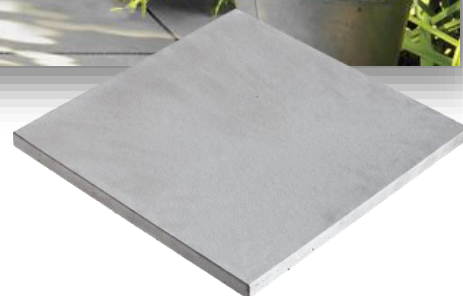
*Sand*



*Aquitaine*



*Grey*





**WARNING:**

Our products are a conglomerate of natural aggregates and colored pigments, therefore we cannot guarantee color uniformity on different supplies. Sandblasting cannot be constantly the same on supplies spread over time.

**EFFLORESCENCE**

1. It should be noted that some artifacts may have whitish halos (efflorescence) derived from calcium hydroxide which rises to the surface by combining with the CO<sub>2</sub> of the atmosphere: efflorescence is a natural phenomenon, which disappears over time. In this regard, precisely because efflorescence is a natural phenomenon, which disappears over time, the supplier company will not consider any complaints raised.
2. If rapid removal is desired, wash the product with a 5-10% solution of water and hydrochloric acid, carefully distributing it with a mop and rinsing thoroughly with water.

**TECHNICAL NOTES: laying poolside and tiles**

- a. a. In relation to the type of processing envisaged, it is advisable to present the edge or flooring dry in order to check for any defects, inconsistencies and / or discrepancies with respect to what is foreseen in the project.
- b. b. Based on "chromatic" or "decorative" needs, the installer is responsible for using pieces from the same supply, selecting the product, in order to mitigate any differences in shades due to the composition of the same.
- c. c. The laying surface must be sufficiently compact, planar and clean; and have reached complete "maturity". This plan must also take into account any precautions useful to prevent shortcomings in resistance, in order to guarantee the support function.
- d. d. As a "glue" use a professional product, suitable for outdoor use, chromatically similar to the material supplied, following the precautions shown in the relative technical data sheet.
- e. e. Before laying, clean the edges and tiles with dry rags. If necessary, use tap water to moisten the rags. Never use abrasive cloths or similar.
- f. f. Edges or tiles must be laid with grouted joints, with a product suitable for outdoor use, in the presence of chemically treated water for swimming pools and chromatically similar to the material supplied.
- g. g. If the installation is NOT the last job, protect the edges and tiles with specific paints for painting, in order to avoid soiling, trampling marks and more in general various damage due to the construction site. Alternatively, perform a thorough cleaning with detergent and degreasing product.
- h. h. At the end of the installation, perform an overall cleaning with concentrated neutral detergent product. Then treat the flooring with breathable water-repellent product, the choice of which is the sole responsibility of the installer.
- i. i. Any halos detectable on freshly laid samples must be reviewed within six months, a time deemed appropriate for the purpose of exhaustion of the maturation cycle of the material.
- j. j. It is recommended to leave at least 1 mm of space between each element.
- k. k. It is recommended to check the condition of the products before laying for any complaints.
- l. l. In any case, the warranty is limited to the exchange of only defective products, but does not cover installation.

**MAINTENANCE: poolside and tiles**

1. Avoid the accumulation of persistent dirt: it is recommended to clean the flooring regularly on the basis of the context and exposure.
2. Any cleaning must NOT take place with high pressure jets and / or with the use of chemically active aggressive substances that could cause significant damage. In this case, the supplier does NOT take any responsibility for the damages thus caused.
3. If necessary and based on the environmental context, the use of detergent, de-waxing and degreasing product may be advisable.
4. If ice forms on the edges, DO NOT use any salt, hot water or anti-freeze products.

**Note**

- The information contained in this document may change at the discretion of the editor, without notice, contextually to the changes of the product in question to this document: it will be the customer's responsibility when ordering to verify the persistent correspondence of the product to the information sheet.
- Any technical diagrams reproduced in this document are for information purposes only and are not valid for regulatory purposes